

CONFIO<sup>®</sup>  
**FAN & LIGHT CONTROL MODULE**  
CTFLZW7

# FAN & LIGHT CONTROL MODULE

---

## Product Datasheet

### 1. General Description

---

The MEDHA module is a remotely controlled Fan&Light Control module designed to operate on AC mains. It features:

- Miniature micro module for AC mains operation
- Enables **4 step fan speed control**
- Offers ON/OFF control of one light.
- Control via **mobile app or rotary step switch**
- Functions as a **Z-Wave network repeater**
- Built with the **latest Z-Wave Plus chip**

### 2. Technical Specifications

---

Feature	Specifications
Power Input	240VAC, 50Hz
Maximum Load per Channel @240VAC	Fan- Max 120W(4 Speed)
CumulativeLoad - 4 Channel Muxed @240VAC	NA
Operating Temperature	-10° to +55°C
Temperature Sensing	Not Available
Relative Humidity	8% - 80%RH
Dimensions	49mm × 49mm × 18mm

# FAN & LIGHT CONTROL MODULE

---

## Product Datasheet


Radio Frequency	865.2MHz (IN)
Surge Protection	1.2 kV
Line of Sight Range	10~15m Indoor /30m Outdoor
Housing Material	Fire Retardant ABS
Supported Load Type	AC based Fan @240VAC
Switch Type	Mobile App / Rotary Step Switch
Z-Wave Compatibility	Z-Wave Plus, acts as a repeater in the network
Safety Features	Requires neutral lead, surge protection, fire-retardant casing
Installation Notes	Use 1.5mm <sup>2</sup> to 2.5mm <sup>2</sup> wires, turn off MCB before installation
Warranty	24 months from date of supply

# FAN & LIGHT CONTROL MODULE

Product Datasheet

## FAN & LIGHT CONTROLLER





Technical Drawing

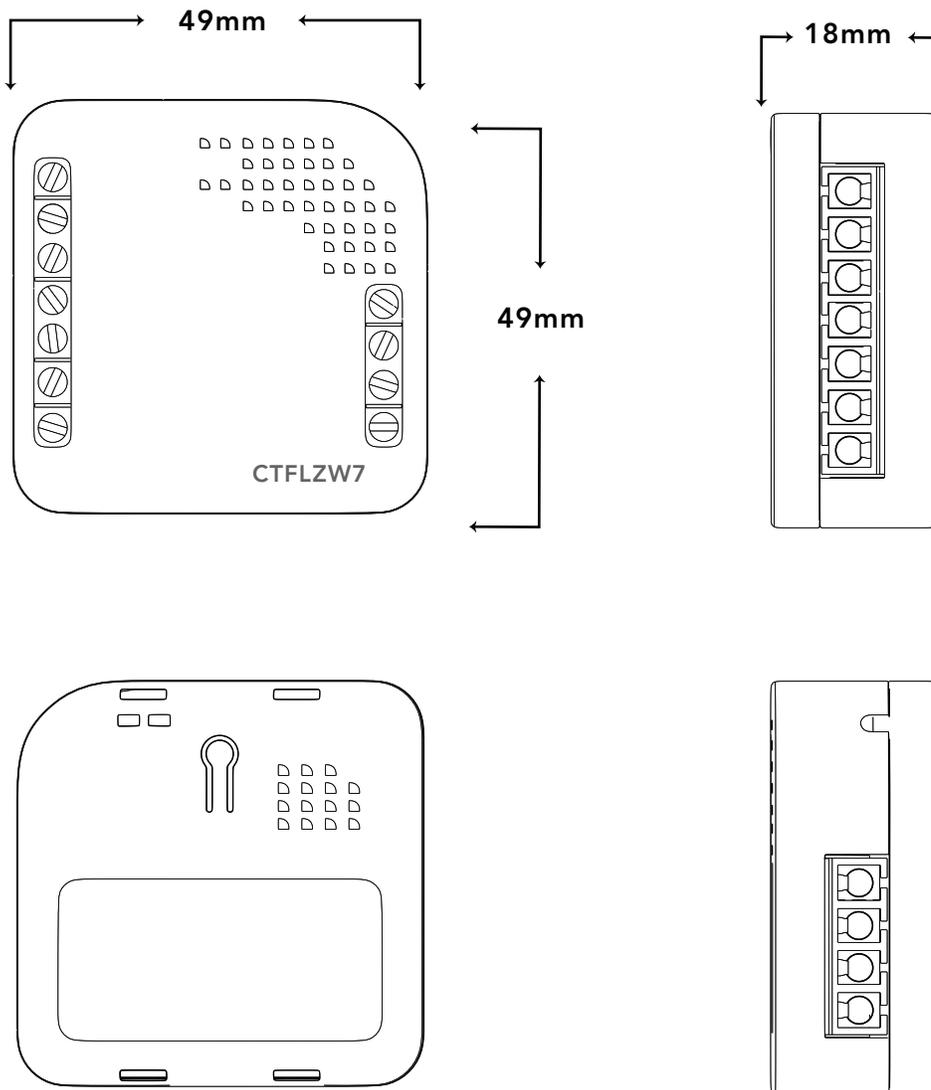

49mm x 49mm x 18mm

# FAN & LIGHT CONTROL MODULE

Product Datasheet

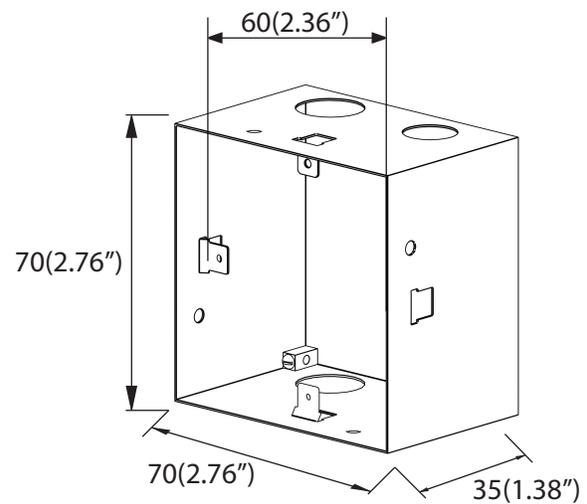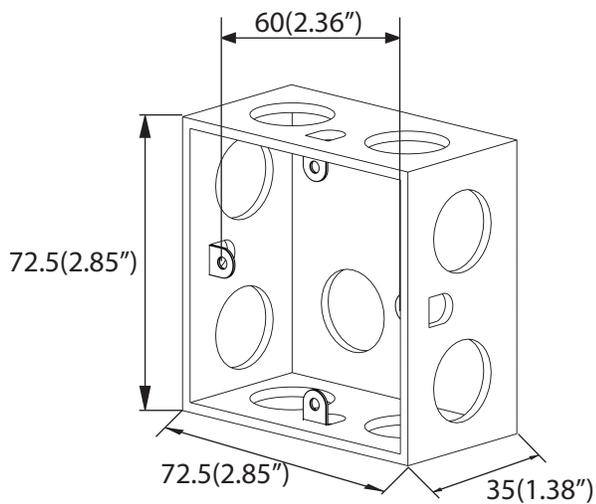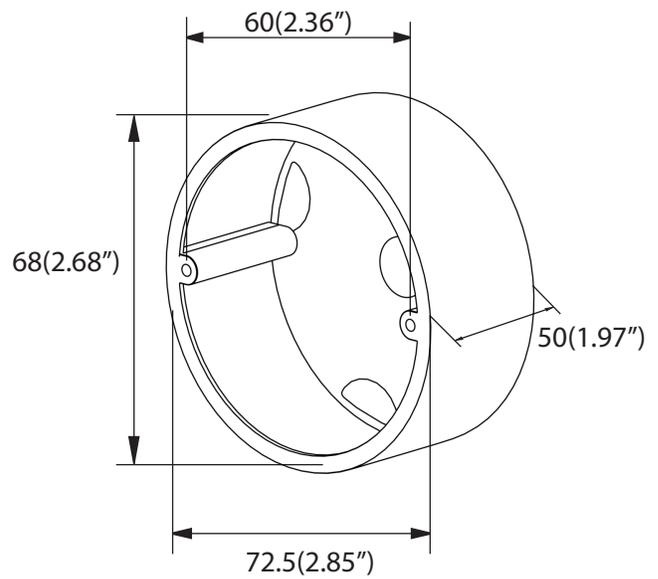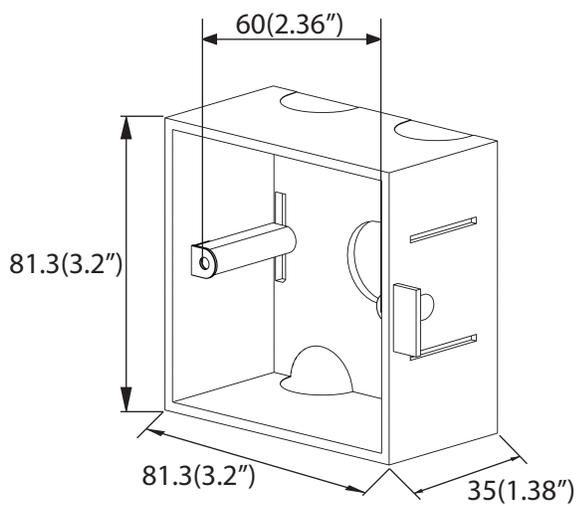

# FAN & LIGHT CONTROL MODULE

---

Product Datasheet

## Warranty

---

24 months from date of supply.

Excludes damage from misuse, natural disasters, unauthorized modifications, or improper installation.

## Contact Information

---

Confio Technologies Pvt. Ltd.



#3500/A, 80 Feet Road, Raghuvanahalli,  
Bangalore – 560062, Karnataka, India



Email: [support@confiolabs.com](mailto:support@confiolabs.com)



Website: [www.confiolabs.com](http://www.confiolabs.com)